


# F SERIES

# W4-1052SD

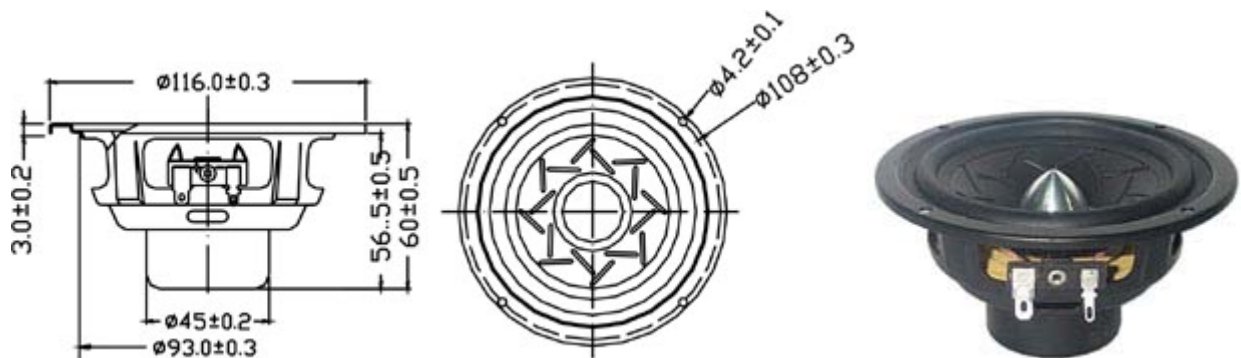

4" PP FULL RANGE

- FULL RANGE DESIGN
- STRUCTURED PP CONE WITH WIDE RANG TEMPERATURE RUBBER SURROUND, STABLE FO
- NEODYMIUM DESIGN,
- STAMPED STEEL BASKET
- MAGNETICALLY SHIELDED
- GOOD FOR HOME THEATER, MULTIMEDIA, CAR APPLICATION

DIAPHRAGM MTL	Structured pp
SURROUND MTL	Rubber
NOMINAL IMPEDANCE	4Ω
DCR IMPEDANCE	3.8Ω
SENSITIVITY 1W/1m	87 dB
FREQUENCY RESPONSE	63-17KHz
FREE AIR RESONANCE	63 Hz
VOICE COIL DIAMETER	25.4 mm
AIR GAP HEIGHT	2.5 mm
RATED POWER INPUT	20 W
MAXIMUM POWER INPUT	40 W
FORCE FACTOR, BL	3.2 TM
MAGNET WEIGHT (oz)	Neodymium
MOVING MASS	3.85g
FERRO FLUID ENHANCED	No
SUSPENSION COMPL.	1643MN <sup>-1</sup>
EFFEC.PISTON AREA	0.0057M <sup>2</sup>
Levc	0.64mh
Zo	32ohm
X-max	3.4 mm
Vas	7.58 Litr.
Qts	0.48





VOICE: 886.2.26570282 FAX: 886.2.26580166  
E-MAIL: info@tb-speaker.com

Qms

4.21

Qes

0.54

---

**CLOSE**