


Specs :

FEATURES

- Vented cast aluminum chassis for optimum strength and low compression
- Geometrically reinforced ceramic cone for optimum piston operation and reduced break-up.
- Soft low damping rubber surround for improved transient response
- Non-conducting fibre glass voice coil former for minimum damping
- Extended copper sleeve on pole piece for low inductance and low distortion
- CCAW voice coil for reduced moving mass
- Long life silver lead wires
- Vented pole piece for reduced compression

Nominal Impedance	8 Ω	Free air resonance, F_s	36 Hz
DC resistance, R_e	5.7 Ω	Sensitivity (2.83 V / 1 m)	85.5 dB
Voice coil inductance, L_e	0.14 mH	Mechanical Q-factor, Q_{ms}	6.0
Effective piston area, S_d	82 cm ²	Electrical Q-factor, Q_{es}	0.39
Voice coil diameter	30.5 mm	Total Q-factor, Q_{ts}	0.37
Voice coil height	14 mm	Moving mass incl.air, M_{ms}	10.8 g
Air gap height	5 mm	Force factor, Bl	5.9 Tm
Linear coil travel (p-p)	10 mm	Equivalent volume, V_{as}	17.7 liters
Magnetic flux density	1.0 T	Compliance, C_{ms}	1.86 mm/N
Magnet weight	0.54 kg	Mechanical loss, R_{ms}	0.4 kg/s
Net weight	1.46 kg	Rated power handling*	50 W

* IEC 268-5, T/S parameters measured on drive units that are broken in.

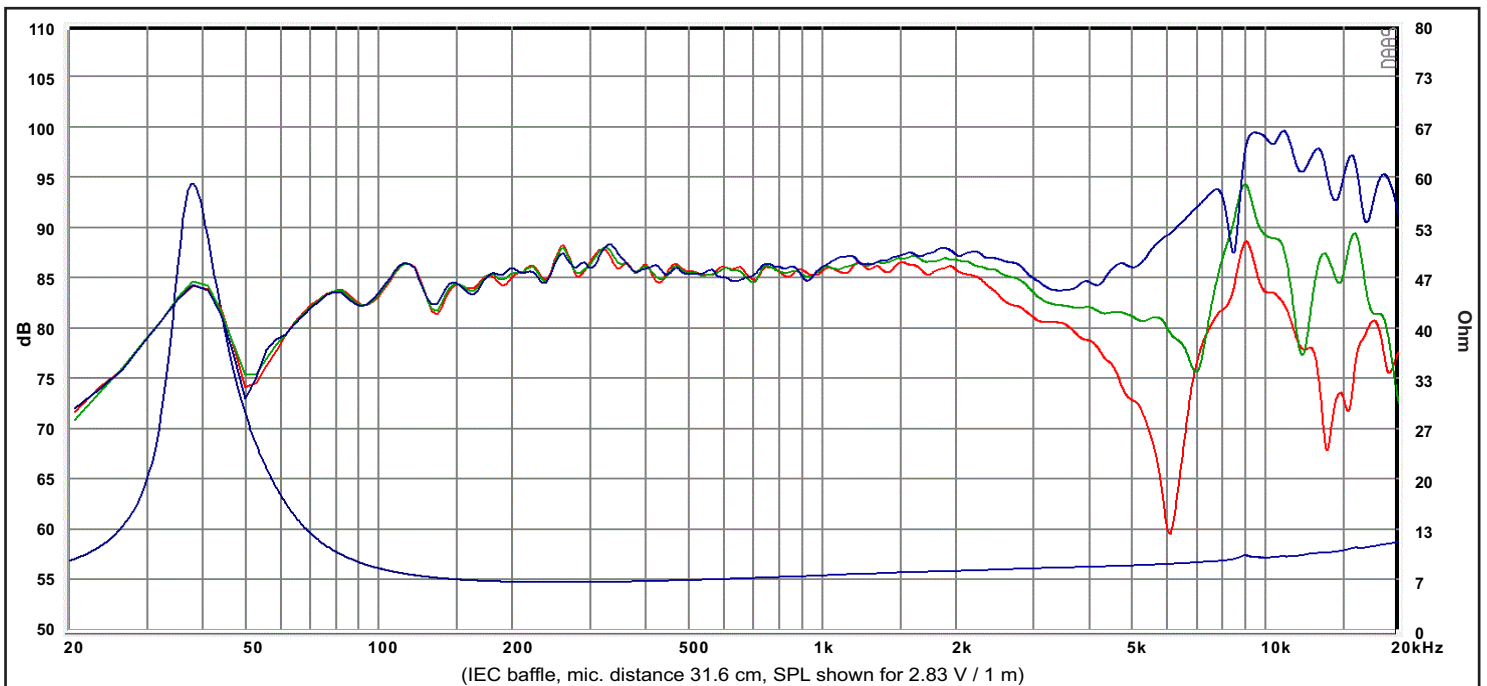

Response Curve :

— (Blue) : on axis — (Green) : 30° off-axis — (Red) : 60° off-axis

REV.0 (05.05.2017)